


sSIP Video Door Station

AVCDS1_v2 Quick Guide

(1) Introduction

WatchNET's Video Door Station (AVCDS1) is a commercial grade full metal body intercom that is weather proof and easy to install. SIP technology enables easy communication with any EPBX or SIP telephone, once registered with SIP server the door station can call landline or mobile phone for video and audio communication.

(2) Wiring

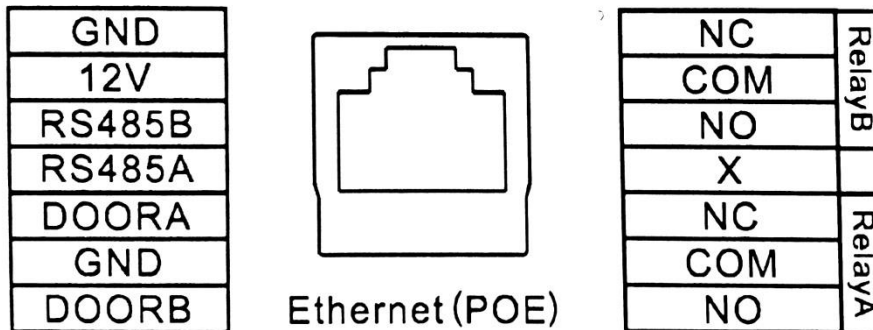

Connection	Definition	Connection	Definition
GND	Power Supply	NC (Relay B)	Relay Output 1
12V		COM (Relay B)	
RS485B	RS485 Connection	NO (Relay B)	
RS485A		X	Reserved
DOOR A	REX Input for Relay A & B	NC (Relay A)	Relay Output 2
GND		COM (Relay A)	
DOOR B		NO (Relay A)	

(3) Power

The Video Door Station supports POE (Power over Ethernet) or 12V DC

(4) Powering up Video Door Station

- a) The Video Door Station is set to DHCP by default, make sure to plug in the door Station to network
- b) To get the IP address press and hold the call button for 5 seconds and a voice prompt will announce the IP of the Door Station
- c) Login using Web browser and enter the IP address of the video station into the address bar, the default username is: "admin" & password: "admin"


(5) Troubleshooting

If the Video Door station does not turn on or does not work properly please refer on below solutions

Possible causes	Solutions
Video Door Station does not announce IP	Make sure to properly connect the Ethernet cable to the network so that the video station can get an IP from the network
No Lights on the Status LED	Make sure to power the video station correctly either using POE or 12V DC
Does not dial when call button is pressed	Make sure to configure the SIP account or configure the correct IP if using IP to IP calling

Note: if any solutions above did not work please contact WatchNET Technical Support phone number +1-866-843-6865 or visit our website @ www.watchnetinc.com

Scan QR Code to Download the Application

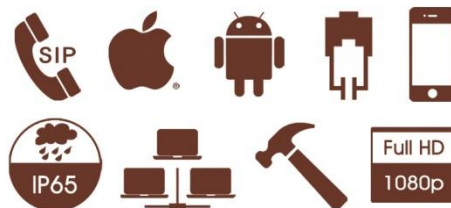

Note: The Pro bell Application works with SIP to SIP or IP to IP calling.

CANADA:

351 Ferrier Street Unit 5
Markham, Ontario L3R 5Z2
Toll Free: 1-866-843-6865
Tel: 1-416-410-6865
Fax: 1-866-331-3341

USA:

171 Cooper Ave. Suite 110
Tonawanda, NY 14150 USA
Toll free: 1-855-404-3193
Fax: 1-866-331-3341

INDIA:

RZ-2, Ground Floor
Kpashera,
Opp Kapashera Police station
New Delhi-110037
Tell: +91 11 26816005
Fax: +91 9654297002

UAE:

P O Box No. 126312
Dubai, UAE
Tel: +971 43584458
Fax: +971 43584458
Mobile: +971 505869290

Info@watchnetinc.com
www.watchnetinc.com

Hong Kong

Unit 04, 7/F
Bright Way Tower
#33 Mong Kok Road
Kowloon, HK
Tel: 00852-27935511
Fax: 00852-35902333
hk@watchnetinc.com