

2.1MP Full HD WDR Network IR Motorized Bullet Camera



MPIX-21-BIMRW



Features:

- ❖ 1/2.7" 2.1 Megapixel progressive scan Exmor CMOS
- ❖ 25/30fps@1080P(1920×1080)
- ❖ H.264 & MJPEG Multi-streaming encoding
- ❖ WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- ❖ 2.7mm ~12mm varifocal lens
- ❖ Max. IR LEDs length 50m/164feet
- ❖ Built-in 2/1 alarm in/out
- ❖ Micro SD memory, IP67, PoE, IK10
- ❖ Vandal Resistant enclosure
- ❖ Built-in web server
- ❖ Smart phones compatible




Professional 64 CH NetFLOW LT
FREE Software included

Optional Brackets:



BRACK-BB-53 BR-POLE-MXC BR-CORN-MXC

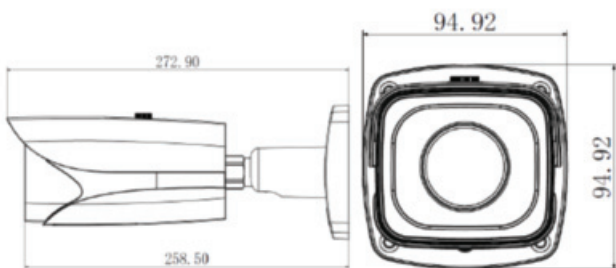

iPhone



Model		MPIX-21-BIMRW
Camera		
Image Sensor	1/2.7" 2.1 Megapixel Exmor CMOS	
Effective Pixels	1920(H) x 1080(V)	
Mini. Illumination	0.01Lux/F1.4(Color); 0Lux/F1.4(IR on)	
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/10000s	
S/N Ratio	More than 50dB	
Scanning System	Progressive scan	
Video Output	1 port	
Lens		
Max Aperture	F1.4	
Focal Length	2.7mm ~ 12mm	
Lens Type	Motorized / Auto Iris (DC)	
Mount Type	Board-in Type	
Angle of View	H: 99°~34°	
Focus Control	Motorized	
Features		
Day/Night	Auto(ICR) / Color / B/W	
Backlight Compensation	BLC / HLC /WDR(120dB)	
Max. IR LEDs Length	50m/164feet	
Gain Control	Auto / Manual	
White Control	Auto	
Noise Reduction	3D	
Privacy Masking	Up to 4 areas	
Video		
Video Compression	H.264 / H.264H / H.264B / MJPEG	
Image Resolution	1080P(1920x1080)/1.3M(1280x960)/720P(1280x720)/D1(704x576/704x480)/CIF(352x288/352x240)	
Frame Rate	Main Stream: 1080P/720P(1 ~ 25/30fps) / Sub Stream: D1/CIF(1 ~ 25/30fps) / Third Stream: 720P(1 ~ 13/4fps)	
Bit Rate	H.264: 32K bps~ 10Mbps	
Network		
Ethernet	RJ-45 (10/100Base-T)	
Network Functions	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
Max. User Access	20 users	
Smart Phone	iPhone, iPad, Android	
ONVIF	ONVIF, PSIA, CGI	
Smart Function		
Smart detection	Supported	
Audio		
Compression	G.711a / G.711u / AAC	
Interface	1/1 channel In/Out	
Auxiliary Interface		
Memory Slot	Micro SD, Max 128GB	
Alarm	2/1 channel In/Out	
Environmental		
Power Supply	DC12V, PoE (802.3af)	
Power Consumption	<11.5W (with IR on, motorized lens working)	
OperatingTemp./Hum.	-40°C~+60°C / -40°F ~ + 140°F, Less than 95% RH	
Dimension	272.9 mm × 94.9mm× 94.9mm / 10.74" x 3.74" x 3.74"	
Weight	1.1kg / 2.43lbs	

All logos & trade marks represent the registered users only. All rights reserved.
All product specifications on this brochure are subject to change without notice.

CANADA:
351 Ferrier Street, Unit 5
Markham, ON L3R 5Z2
Toll Free: 1-866-843-6865
Tel: 416-410-6865
Fax: 1-866-331-3341

USA:
171 Cooper Ave. Suite 110
Tonawanda, NY 14150 USA
Toll Free: 1-855-404-3193
Local: 1-716-877-7277
Fax: 1-866-331-3341

info@watchnetinc.com
www.watchnetinc.com

INDIA:
RZ- 2, Ground Floor
Kapashera
Opp Kapashera Police Station
New Delhi-110037
Tel/Fax: +91 11 26816005

UAE:
P O Box 126312
No 703, Oxford Towers
Business Bay
Dubai, UAE
Tel: +971 4 2767117