

### Full HD Network Mini 4X Optical Zoom PTZ Dome Camera



MPIX-21MP4X




### 2.1MP Full HD 4x Network Mini PTZ Dome Camera




#### PRODUCT FEATURES

- ❖ Sony 1/3" Exmor CMOS High definition sensor
- ❖ 2.1MP Full HD 4x Network PTZ Dome Camera
- ❖ H.264 & MJPEG dual-stream encoding
- ❖ 2.7mm~11mm (4x Optical zoom, 16x Digital zoom))
- ❖ Support intelligent 3D positioning
- ❖ Max. 30fps@1080p(1920x1080)
- ❖ WDR, Day/Night(ICR), Ultra DNR (2D&3D), Auto iris, Auto focus, AWB, AGC, BLC
- ❖ Multiple network monitoring: Built-in Web viewer and VMS
- ❖ Up to 300 presets, 5 Pattern, 8 Tour, Auto Pan, Auto Scan
- ❖ Micro SD memory, IP66, PoE
- ❖ Max 100°/s pan speed

**\* Power supply included. Bracket available.**

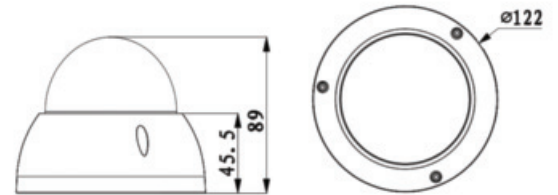

Optional Brackets:




BRACK-WM-48



BRACK-BB-48



Professional 64 CH NetFLOW LT  
FREE Software included



iPhone



Compatible with most major  
NVR Software



Model Number	MPIX-21MP4X
<b>Camera</b>	
Image Sensor	Sony 1/2.7" Exmor CMOS High definition sensor
Scanning System	Progressive scan
Effective Pixels	1920(H) x 1080(V), 2.1 Megapixels
Min Illumination	Color: 0.05Lux@F1.6; B/W: 0.005Lux@F1.6
Electronic Shutter Speed	1/3s ~1/30,000s
S/N Ratio	More than 50dB
Scanning	Progressive Scan System
<b>Lens</b>	
Max Aperture	F1.6~ F2.8
Focal Length	2.7mm~11mm (4x Optical zoom)
Angle of View	H: 112.5° ~ 39°
Focus Control	Auto / Manual
<b>Features</b>	
Day/Night	Auto(ICR) / Color / B/W
White Balance	Auto, ATW, Indoor, Outdoor, Manual
Backlight Compensation	BLC / HLC / WDR
Noise Reduction	2D / 3D
Digital Zoom	16x
Privacy Masking	Up to 24 areas
Gain Control	Auto / Manual
<b>PTZ</b>	
Manual Control Speed	Pan: 0.1° ~100° /s;Tilt: 0.1° ~60° /s
Preset Speed	Pan:100° /s;Tilt: 60° /s
Pan/Tilt Range	Pan: 0° ~ 355°;Tilt: 0° ~ 90°, auto flip 180°
Preset	300
Speed Setup	Auto focal length/ speed adaptation
PTZ Mode	5 Pattern, 8 Tour, Auto Pan, Auto Scan
Idle Action	Activate Preset/Pan/Scan/Tour/Pattern if there is no command in the specified period
Power up Action	Auto restore to previous PTZ and lens status after power failure
<b>Video</b>	
Compression	H.264 / MJPEG
Resolution	1080P(1920×1080) / 720P(1280×720) / D1(704×576/704×480) / CIF (352×288/352×240)
Bit Rate	H.264: 448K ~ 8192Kbps, MJPEG: 5120K ~ 10240Kbps
Frame Rate	Main Stream: 1080p (1 ~ 25/30fps)/ 720p(1 ~ 50/60fps) / Sub Stream: D1/CIF (1 ~ 25/30fps)
<b>Network</b>	
Ethernet	RJ-45 (10/100Base-T)
ONVIF	ONVIF Profile S
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
Smart Phone	iPhone, iPad, Android
Max. User Access	20 users
<b>Auxiliary Interface</b>	
Memory Slot	Micro SD, Max 64GB
<b>General</b>	
Power Consumption	10W
Power Supply	DC12V, P0E
Protection Level	IP66, PoE
Operating temperature	-30° to 60 °C (-22°F to 140°F) / Less than 90% RH
Dimensions	Φ132.7(mm) x 116.5 (mm) / Φ5.22" x 4.59"
Weight	0.95kgs / 2.09lb

All product specifications on this brochure are subject to change without notice.

**CANADA:**  
351 Ferrier Street, Unit 5  
Markham, ON L3R 5Z2  
Toll Free: 1-866-843-6865  
Tel: 416-410-6865  
Fax: 1-866-331-3341

**USA:**  
171 Cooper Ave. Suite 110  
Tonawanda, NY 14150 USA  
Toll Free: 1-855-404-3193  
Local: 1-716-877-7277  
Fax: 1-866-331-3341

[info@watchnetinc.com](mailto:info@watchnetinc.com)  
[www.watchnetinc.com](http://www.watchnetinc.com)

**INDIA:**  
RZ- 2, Ground Floor  
Kapashera  
Opp Kapashera Police Station  
New Delhi-110037  
Tel/Fax: + 91 11 26816005

**UAE:**  
P O Box 126312  
No 703, Oxford Towers  
Business Bay  
Dubai, UAE  
Tel: +971 4 2767117