


3MP HD WDR Intelligent Network Motorized IR Dome Camera



MPIX-30VDW-IRM



Full HD Vandal-proof IR Network Dome Camera



Features:

- ❖ Motorized vandal-proof dome camera
- ❖ 1/3" 3 Megapixel progressive scan Aptina CMOS
- ❖ Max 25/30fps@3MP(2048x1536)
- ❖ H.264 & MJPEG dual codec
- ❖ Ultra-WDR up to 120dB
- ❖ Smart detection: Supported
- ❖ Day/Night(ICR), Ultra 3DNR, Auto Iris, AWB, AGC, BLC
- ❖ 3~9mm varifocal motorized lens (Optional 2.8 ~ 12mm)
- ❖ Max. IR LEDs length 20m
- ❖ Ultra 3D DNR, Ultra Defog, ROI, EIS
- ❖ Micro SD memory, IP66, IK10, PoE
- ❖ Multiple network monitoring: Built-in web server & Multifunction VMS
- ❖ Smart phones compatible




Professional 64 CH NetFLOW LT FREE Software included

Optional Brackets:



BRACK-MPIX-WALL-W BRACK-MPIX-PEND-W

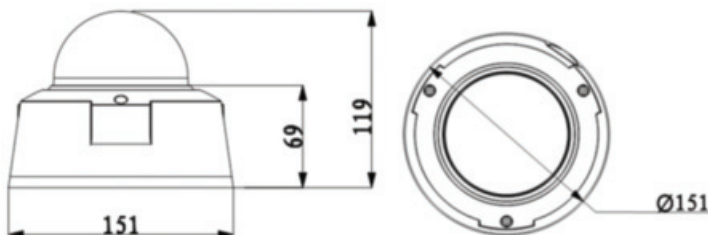

iPhone



Model	MPIX-30VDW-IRM
Camera	Motorized variable focus
Image Sensor	1/3" 3 Megapixel Aptina CMOS
Effective Pixels	2048(H) x 1536(V)
Mini. Illumination	Color: 0. 1Lux/F1.2, B/W: 0.01Lux/F1.2
Electronic Shutter Speed	Auto/Manual 1/3~1/10000
S/N Ratio	>50dB
Scanning System	Progressive
Video Output	1 Port
Lens	
Max Aperture	F1.4
Focal Length	3 ~ 9mm motorized lens (Optional 2.8 ~ 12mm)
Focus Control	Auto
Lens Type	Motorized / Auto Iris(DC)
Mount Type	Board-in Type
Angle of View	H: 85.6°(Wide)~28.6°(Tele)
Features	
Day/Night	Auto(ICR) / Color/B/W
Backlight Compensation	BLC / HLC / WDR (120dB)
Max. IR LEDs Length	20m Smart IR technology
Gain Control	Auto / Manual
White Balance	Auto
Noise Reduction	3D
Privacy Masking	Up to 4 areas
Video	
Video Compression	H.264/MJPEG
Image Resolution	3M(2048x1536)/1080P(1920x1080) / 720P(1280x720) /D1(704x576) / CIF(352x288)
Frame Rate	Main Stream: 3M/1080P (1~25/30fps) / Sub Stream: D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 32K ~ 8192Kbps
ROI	Up to 4 areas
Network	
Ethernet	RJ-45 (10/100Base-T)
Network Functions	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android
ONVIF	ONVIF profile S, PSIA, CGI
Smart Function	
Smart detection	Supported
Audio	
Compression	G.711a / G.711u
Interface	1/1 channel In/Out
Auxiliary Interface	
Memory Slot	Micro SD, Max 64GB
Alarm	1/1 channel In/Out
Environmental	
Power Supply	DC12V/AC24V, PoE(802.3af)
Power Consumption	<12W (IR on: +2W)
OperatingTemp./Hum.	-35°C~+60°C /-29°F~+140°F, Less than 95%RH
Protection Level	IP66, IK10, POE
Dimension	Φ151mm×119mm / 5.94" × 4.68"
Weight	1.25kg / 2.75lb

All logos & trade marks represent the registered users only. All rights reserved.
All product specifications on this brochure are subject to change without notice.

CANADA:
351 Ferrier Street, Unit 5
Markham, ON L3R 5Z2
Toll Free: 1-866-843-6865
Tel: 416-410-6865
Fax: 1-866-331-3341

USA:
171 Cooper Ave. Suite 110
Tonawanda, NY 14150 USA
Toll Free: 1-855-404-3193
Local: 1-716-877-7277
Fax: 1-866-331-3341

info@watchnetinc.com
www.watchnetinc.com

INDIA:
RZ- 2, Ground Floor
Kapashera
Opp Kapashera Police Station
New Delhi-110037
Tel/Fax: +91 11 26816005

UAE:
PO Box 126312
No 703, Oxford Towers
Business Bay
Dubai, UAE
Tel: +971 4 2767117