

4MP HD WDR Intelligent Vandal Proof Motorized IR Dome Camera




MPIX-40VDV-IRM




Features:

- ❖ Motorized vandal-proof IR dome camera
- ❖ 1/3" 4MP progressive scan CMOS
- ❖ 25/30fps@4Mp(2688×1520)
- ❖ H.265 & H.264 triple-stream encoding
- ❖ WDR up to 128dB
- ❖ Smart detection
- ❖ Day/Night(ICR), Ultra 3DNR, Auto Iris, AWB, AGC, BLC
- ❖ 2.7mm - 12mm motorized lens
- ❖ Max. IR LEDs length 50m/164feet
- ❖ 1/1 Alarm in/out, 1/1 audio in/out
- ❖ Micro SD memory, IP68, IK10, PoE
- ❖ Multiple network monitoring:
Web viewer, eVMS-PRO & HD-VMS
- ❖ Smart phones compatible

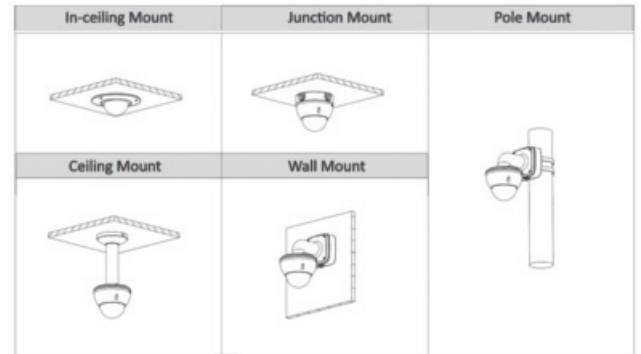

VMS-PRO

Enterprise Class VMS Solution

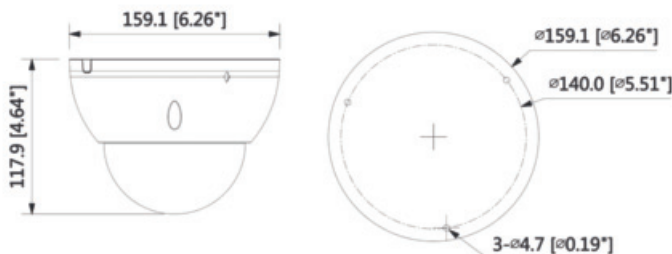

iPhone



Optional Brackets:



BRACK-BB-63



BRACK-WM-63

PRODUCT OVERVIEW

The 4 Megapixel Dome IR camera with H.265 encoding technology delivers exemplary video resolution with a motorized 2.7mm – 12mm varifocal lens. The camera's elegant blend of aesthetics combined with a range of easy mounting solutions provides an excellent choice for a variety of small to mid-size applications and economical too. The camera saves bandwidth and storage, energy-saving design to enhance the monitoring system, smart IR technology, intelligent image analysis techniques. It provides excellent image quality and intelligent and efficient event reminders. This series provides IP68 weatherproof and IK10 vandal-proof protection feature.

SYSTEM FUNCTIONS

Smart Code (H.265+)

Delivering highest video quality without catheterize the network & bandwidth, Smart H.265+ codec is the optimized implementation of H.265. The Smart H.265+ encoding platform includes a scene adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction, providing a savings of up to 70% of bandwidth and storage when compared with standard H.265.

Wide Dynamic Range, 128dB

Embedded with industry's leading wide dynamic range (WDR) technology, vivid pictures are achieved even in the most intense contrast lighting conditions. For applications with both bright and low lighting conditions that change quickly, True WDR (128dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Regions of Interest (ROI)

Regions of Interest is a user defined function that allows the operator to monitor specific areas of a scene while still maintaining overall situational awareness of less important areas Off / On (4 Zone)

True Day/Night

A day/night mechanical IR cut filter makes this camera ideal for applications with fluctuating lighting conditions, delivering color images during the day and automatically switching to monochrome as the scene darkens.

Smart IR feature

With IR illumination, detailed images can be captured in low light or total darkness. The camera's Smart IR technology adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object. Smart IR technology prevents IR LEDs from whiting out images as they come closer to the camera. The camera's integrated infrared illumination provides high performance in extreme low-light environments up to 50m (164ft).

HEVC (High Efficiency Video Coding)

H.265 ITU-T VCEG is a new video coding standard. H.265 Following standard developed around the existing video coding standard H.264, some retain the original technology, while some of the relevant technology to improve the new technology uses advanced technology to improve the relationship between the code stream, encoding quality, and the delay between algorithm complexity, optimize settings specific contents include: Improve compression efficiency, improve the robustness and error recovery capabilities, real- me to reduce the delay, reduce channel acquisition me and a random access delay, reduce complexity, etc.

Voltage Tolerance & Protection

Supporting $\pm 10\%$ input voltage tolerance, this camera suits even the most unstable conditions for outdoor applications. Its 6KV lightning rating provides protection against the camera and its structure from the effects of lightning.

Interoperability

The camera conforms to the ONVIF (Open Network Video Interface Forum) specifications, ensuring interoperability between network video products regardless of any manufacturer.

Model	MPIX-40VDV-IRM				
Camera					
Image Sensor	1/3" 4Megapixel progressive scan CMOS				
Effective Pixels	2688(H) x 1520(V)				
Mini. Illumination	0.03Lux/F1.4 (Color); 0Lux/F1.4 (IR on)				
RAM / ROM	512MB / 32MB				
S/N Ratio	More than 50dB				
IR Distance	50m/164ft				
Scanning System	Progressive				
IR On / Off Control	Auto / Manual				
IR LEDs	3				
Lens					
Lens Type	Motorized/ Auto Iris(DC)				
Focal Length	2.7mm - 12mm				
Max. Aperture	F1.4				
Angle of View	H:100°~35°, V:54°~20				
Mount Type	Board-in Type				
Optical Zoom	4x				
Close Focus Distance	0.3m				
Distance	Lens	Detect	Observe	Recognise	Identify
	W	68m/223ft	27m/89ft	14m/49ft	7m/23ft
	T	193m/633ft	77m/253ft	39m/128ft	19m/62ft
Intelligence					
IVS (Optional)	Tripwire, Intrusion, Object Abandoned / Missing				
Advanced Intelligent Functions	Face Detection				
Video					
Compression	H.265+/H.265/H.264+/H.264				
Streaming Capability	3 Streams				
Resolution	4M(2688x1520)/3M(2304x1296)/1080P(1920x1080)/1.3M(1280x960)/720P(1280x720)/D1(704x576/704x480)/VGA(640x480)/CIF(352x288/352x240)				
Bit Rate	H.264: 24~10240Kbps / H.265: 14~9984Kbps				
Frame Rate	Main Stream: 4M(1~25/30fps) Sub Stream: D1(1~25/30fps) Third Stream: 1080P(1~25fps)				
Bit Rate Control	CBR / VBR				
Day/Night	Auto (ICR) / Color / B/W				
BLC Mode	BLC / HLC / WDR (128dB)				
White Balance	Auto / Natural / Street Lamp / Outdoor / Manual				
Gain Control	Auto / Manual				
Noise Reduction	3D DNR				
Motion Detetion	Off / On (4 Zone, Rectangle)				
Region of Interest	Off / On (4 Zone)				
Flip	0°/90°/180°/270°				
Mirror	Off / On				
Smart IR	Supported				
Digital Zoom	16x				
Privacy Masking	Off / On (4 Area, Rectangle)				

Audio	
Compression	G.711a / G.711Mu / AAC / G.726
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP;NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP
Interoperability	ONVIF, PSIA, CGI
Streaming Method	Unicast / Multicast
Max. User Access	10 Users / 20 Users
Edge Storage	NAS Local PC for instant recording Mirco SD card 128GB
Web Viewer	IE, Chrome, Firefox, Safari
Management Software	HD-VMS & eVMS-PRO (Enterprise Class VMS software)
Smart Phone	iOS, Android
Certifications	
Certifications	CE, FCC, RoHS
Interface	
Video Interface	N/A
Audio Interface	1/1 channel In/Out
RS485	N/A
Alarm	1/1 channel In/Out
Electrical	
Power Supply	DC12V, AC24V, PoE(802.3af)(Class 0)
Power Consumption	<12.5W
Environmental	
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) Less than 95% RH
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) Less than 95% RH
Protection Level	Ingress Protection – IP68
Vandal Resistance	IK10
Construction	
Casing	Metal
Dimensions	Φ159.1mm×117.9mm (6.26"×4.64")
Net Weight	0.89kg (1.96lb)
Gross Weight	1.13kg (2.49lb)

All logos & trade marks represent the registered users only. All rights reserved.
All product specifications on this brochure are subject to change without notice.

CANADA:
351 Ferrier Street, Unit 5
Markham, ON L3R 5Z2
Toll Free: 1-866-843-6865
Tel: 416-410-6865
Fax: 1-866-331-3341

USA:
171 Cooper Ave. Suite 110
Tonawanda, NY 14150 USA
Toll Free: 1-855-404-3193
Local: 1-716-877-7277
Fax: 1-866-331-3341

Rev-June 12, 2019

info@watchnetinc.com
www.watchnetinc.com

INDIA:
RZ- 2, Ground Floor
Kapashera
Opp Kapashera Police Station
New Delhi-110037
Tel/Fax: +91 11 26816005

UAE:
PO Box 126312
No 703, Oxford Towers
Business Bay
Dubai, UAE
Tel: +971 4 2767117