

2.1MP WDR IR Turret Network Camera



MPIX-211RBFTL




Features:

- 2.1MP, 1/2.8" CMOS image sensor
 - Sensefier technology, high image definition
 - Output max. 2.1MP (1920 × 1080) @25/30fps
 - H.265 codec, high compression rate, ultra-low bit rate
 - Built-in IR LED, max. IR distance: 30m (98.4 ft)
 - ROI, SMART H.264/H.265, flexible coding, applicable to various bandwidth and storage environments
 - Rotation mode, WDR(120dB), 3D DNR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
 - Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection
 - Supports max. 256GB Micro SD card
 - 12V DC/PoE power support
 - IP67 protection
- Supports multiple analytic functions**



FREE Multisite VMS software
Download from www.watchnetinc.com

Optional Brackets:

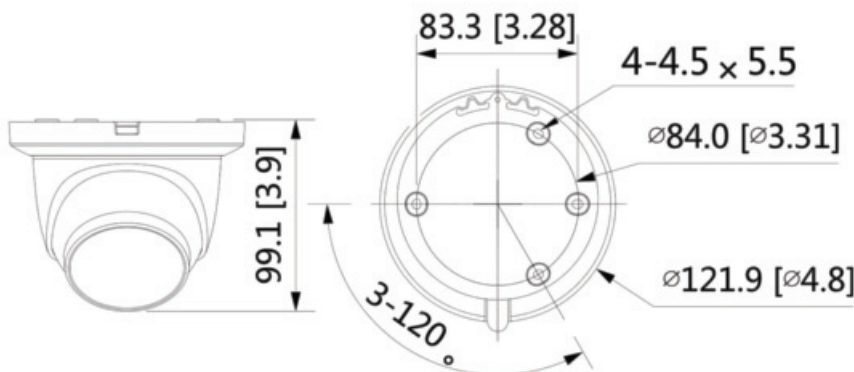

Model	MPIX-21IRBFTL
Camera	
Image Sensor	1/2.8" 2.1Megapixel progressive CMOS
Effective Pixels	1920(H) x1080(V)
Min. Illumination	0.002 Lux @F1.6
RAM / ROM	128MB/128MB
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/1000000s
IR Distance	Up to 30m (98ft)
Scanning System	Progressive
IR On / Off Control	Auto / Manual
IR LEDs	2
Lens	
Lens Type	Fixed-focal
Focal Length	2.8mm
Max. Aperture	Fixed Aperture, F1.6 / F1.6
Field of View	Pan:106°Tilt: 56° Diagonal: 126°
Mount Type	M12
Focus Control	Fixed
Close Focus Distance	0.6m (2.0ft)
Video	
Compression	H.265; H.264; H.264B; MJPEG
Smart Codec	Yes
Video Frame Rate	CBR / VBR
Video Frame Rate	Main stream: 1920 × 1080 (1fps-25/30fps) Sub stream: 704 × 576 (1 fps-25fps) 704 × 480 (1 fps-30fps)
Resolution	1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)
Video Bit Rate	H.264: 32 Kbps-6144 Kbps / H.265: 12 Kbps-6144 Kbps
Bit Rate Control	CBR / VBR
Day/Night	Auto (ICR) / Color / B/W
BLC Mode	BLC / HLC / WDR(120dB)
White Balance	Auto / Natural / Street Lamp / Outdoor / Manual
Gain Control	Auto / Manual
Noise Reduction	3D DNR
Motion Detetion	Off / On (4 Zone, Rectangle)
Region of Interest	Off / On (4 Zone)
Image Rotation	0°/90°/180°/270° (Support 90°/270° with 1080p resolution and lower)
Mirror	Off / On
Smart IR	Yes
Privacy Masking	Off / On (4 Area, Rectangle)
Smart event	
Standard Analytics	Line Crossing; Intrusion

Audio	
Audio Compression	G.711A; G.711Mu; G.726; AAC
Network	
Ethernet	RJ-45 (10/100 Base-T)
Protocol	IPv4; IPv6; HTTP; HTTPS; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; PPPoE; 802.1x; Bonjour
Interoperability	ONVIF(Profile S/Profile G/Profile T); P2P
User/Host	20 Users
Edge Storage	WatchNET Cloud; FTP; SFTP; Micro SD Card (Support max. 256GB); NAS
Browser	IE, Chrome, Firefox
Mobile Phone	IOS; Android
Electrical	
Power Supply	12V DC/PoE (802.3af)
Power Consumption	<6.5W
Environmental	
Operating Conditions	-40°C ~ +60°C (-40°F ~ +140°F) Less than 95% RH
Storage Conditions	-40°C ~ +60°C (-40°F ~ +140°F)
Protection Level	Ingress Protection – IP67
Construction	
Casing	Metal
Dimensions	99.1mm × Φ121.9mm (3.9" × Φ4.8")
Net Weight	0.48 kg (1.1lb)
Gross Weight	0.65 kg (1.4lb)

** All product names, logos and brands are property of their respective owners. All company products and service names used on this box/website/brochure are for identification purposes only. Use of these names, logos and brands does not imply endorsement. 2019 WatchNET Inc. © All Rights Reserved. All product specifications are subject to change without notice.*

CANADA:
351 Ferrier Street, Unit 5
Markham, ON L3R 5Z2
Toll Free: 1-866-843-6865
Tel: 416-410-6865

USA:
171 Cooper Ave. Suite 110
Tonawanda, NY 14150 USA
Toll Free: 1-866-843-6865
Local: 1-716-877-7277

Nov. 01, 2019

info@watchnetinc.com
www.watchnetinc.com

INDIA:
RZ- 2, Ground Floor, Kapashera
Opp Kapashera Police Station
New Delhi-110037
Tel/Fax: +91 11 26816005

UAE:
P O Box 126312
No 703, Oxford Towers
Business Bay, Dubai, UAE
Tel: +971 4 2767117