

4K

**8CH Compact 1U 1HDD 8PoE
Network Video Recorder**



ENMR3-08POE



Features:






- Embedded LINUX OS
- Industrial-grade embedded processor
- New 4.0 user interface, Security baseline 2.1
- H.264, H.265, Smart H.264+, and Smart H.265+. H.265 auto switch
- Max. decoding capability: 8 × 1080p@30 fps.
Supports adaptive decoding
- Supports mainstream cameras of ONVIF and RTSP protocols
- P2P remote surveillance, video play on mobile device
- VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K
- **AI by Camera:** Face detection, fenced area protection, IVS, people counting, heat map, and motion detection



* (AI Features only supported when using AI Cameras)



FREE Multisite VMS software
Download from www.watchnetinc.com

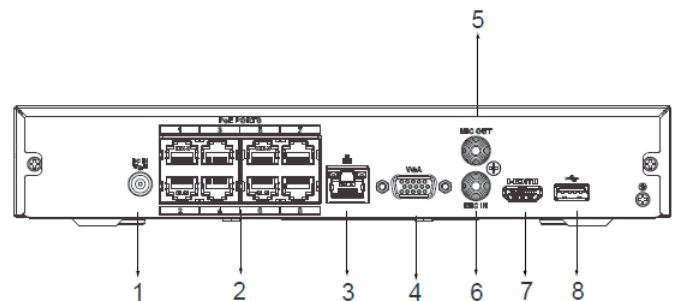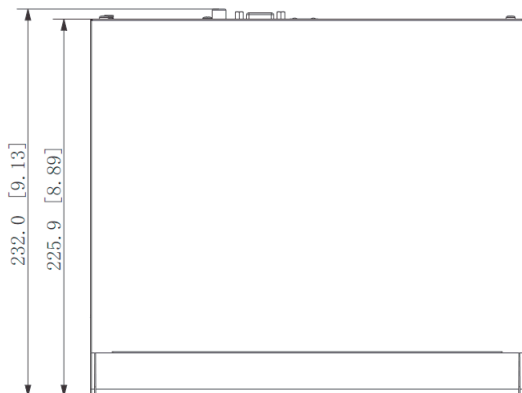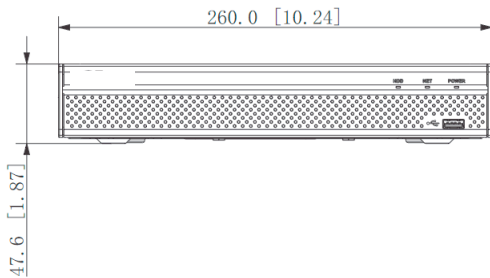

- | | |
|---------------------------|----------------------------|
| 1 DC Power Input | 2 PoE Ports |
| 3 Network Port | 4 VGA Port |
| 5 AUDIO IN, RCA Connector | 6 AUDIO OUT, RCA Connector |
| 7 HDMI Port | 8 USB Port |

Technical Specifications	
System	
Main Processor	Industrial-grade embedded processor
OS	Embedded Linux
Operation Interface	Web/operating in local GUI
Fenced Area Protection by Camera	
Performance	8 channels
AI Search	Search for pictures by channel, time and event type
Face Detection by Camera	
Performance	4 channels
Face Attributes	6 attributes: Gender, age, glasses, expression, mouth mask, and beard
AI Search	Search for pictures by channel, time and face attributes
Motion Detection by Camera	
Performance	8 channels
AI Search	Search by target classification (human, vehicle)
Video	
Access Channel	8
Network Bandwidth	Access: 80 Mbps; Storage: 80 Mbps; Forward: 60 Mbps
Resolution	8MP; 6MP; 5MP; 4MP; 3MP; 1080p; 720p; D1
Decoding Capability	8 × 1080p@30 fps
Video Output	1 × VGA output, 1 × HDMI output, supports simultaneous video sources output for VGA & HDMI
Multi-screen Display	1, 4, 8, 9 views
Third-party Camera Access	ONVIF; RTSP
Compression	
Video	Smart H.265/H.265/Smart H.264/H.264/MJPEG
Audio	PCM/G711A/G711U/G726/AAC
Network	
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; RTSP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; DDNS; FTP; Alarm Server; IP Search (Support WatchNET IP camera; DVR; NVS; etc.); P2P; auto register
Mobile Phone Access	Android; iOS
Interoperability	ONVIF(profile T/S/G); CGI; SDK
Browser	Chrome; IE9 or later; Firefox
Record Playback	
Multi-channel Playback	Up to 8 channels for playback
Record Mode	Manual record; alarm recording; Motion Detection recording; smart recording
Storage	Local HDD; network
Backup	USB storage device
Playback Function	1. Play/pause/stop/slow/quick/backward/by frame 2. Full screen, backup (video clip/file), partial zoom in, and audio on/off

Storage	
Disk Group	Yes
Alarm	
General Alarm	Motion detection, privacy masking, video loss, scene changing, PIR alarm, IPC external alarm
Anomaly Alarm	Camera disconnection, storage error, disk full, IP conflict, MAC conflict, login locked, and cyber security exception
Intelligent Alarm	Face detection, fenced area protection (intrusion and line crossing), IVS, people counting, heat map, and motion detection alarms
Alarm Linkage	Recording, snapshot, audio, buzzer, log, preset, and email
External Port	
Audio Input	1 × RCA input
Audio Output	1 × RCA output
HDD	1 SATA III ports, up to 10 TB for a single HDD. The maximum HDD capacity varies with environment temperature
USB	2 (1 × front USB2.0; 1 × back USB2.0)
HDMI	1 (supports up to 4K resolution output)
VGA	1
Network	1 × RJ-45, 10/100 Mbps self-adaptive Ethernet port
POE	8
General Parameter	
Power Supply	DC48 V/53 V, 2A/1.8 A
Power Consumption	< 10 W (HDD not included, idling) Total output power of PoE is 72W, the maximum output power of a single port is 25.5W
Net Weight	0.92kg (2.03lb)
Gross Weight	2.07kg (4.56lb)
Product Dimensions	260mm × 232.3mm × 50.3mm (10.24" × 9.14" × 1.98") (W × L × H)
Package Dimensions	117mm × 373mm × 307mm (4.61" × 14.69" × 12.09") (W × L × H)
Operating Conditions	-10°C to +55°C (+10°F to +131°F)
Storage Conditions	0°C to +40°C (32°F to 104°F)
Operating Humidity	10c/o ~ 93c/o
Storage Humidity	30% ~ 85%
Operating Altitude	3000m (9842.52ft)
Installation	Desktop mounted
Certification	CE, FCC

* All product names, logos and brands are property of their respective owners. All company products and service names used on this box/website/brochure are for identification purposes only. Use of these names, logos and brands does not imply endorsement. 2021 WatchNET Inc. © All Rights Reserved All product specifications are subject to change without notice.

CANADA:
351 Ferrier Street, Unit 5
Markham, ON L3R 5Z2
Toll Free: 1-866-843-6865
Tel: 416-410-6865

USA:
171 Cooper Ave. Suite 110
Tonawanda, NY 14150 USA
Toll Free: 1-866-843-6865
Local: 1-716-877-7277

UAE:
PO Box 126312
No 703, Oxford Towers
Business Bay, Dubai, UAE
Tel: + 971 4 2767117

May 28, 2021

info@watchnetinc.com
www.watchnetinc.com