WatchNET®
Security Since 2000

POESW08M

10-port Gigabit Industrial Switch with 8-port PoE (Managed)

POESW08M

Product Overview

POESW08M is a layer-2 switch. Equipped with high performance switching engine and large buffer memory, it features low transmission delay and high reliability. The solid and sealed all-metal case design and efficient surface heat dissipation make it can work in the environment from –40°C to +75°C / –40°F to +167°F. The protection for power input end overcurrent, over-voltage and EMC can effectively resist the interference from static electricity, lightning, and pulse. Redundant power supply guarantees stable operation for the system. With Telnet, WEB management, SNMP and other functions, the device can be remotely managed. It can directly connect to iLinks-View.

Product Features

- All-gigabit port design
- Supports IEEE802.3af, IEEE802.3at, Hi-PoE and IEEE802.3bt(red port) standards
- 250m long-distance PoE transmission (10 Mbps)
- PoE Watchdog
- Supports STP, RSTP, and MSTP
- IEEE802.1Q-based VLAN configuration
- Manual link aggregation and static LACP
- Wide voltage design (9 V–57 V)
- Desktop mount and DIN-rail mount

Scene

The device is applicable for use in different scenarios, including corridors and offices.

Functions

PoE Watchdog
Adopts the innovative PoE Watchdog. PoE Watchdog can be switched on by dialing or turning on the WEB page switch. It enables the switch to automatically detect port status and restart failed ports to recover connection in case of camera connection exception. This enables intelligent operation and maintenance management in its truest sense, effectively reducing manual maintenance costs.

Long-distance PoE
By dialing or enabling long-distance transmission on the WEB interface, the transmission distance of a PoE port can be up to 250 m, meeting the requirements of wired transmission (bandwidth reduced to 10 Mbps).

Red Port 90W
The red ports support IEEE802.3af, IEEE802.3at, Hi-PoE and IEEE802.3bt standards, with a maximum output power consumption rate of 90W per port. Suitable for powering high-power devices.

Wide Operating Temperature
Supports working in temperatures between -40°C to +75°C. It has builtin professional mine-proof circuits, which effectively reduce the impact of thunderstorms on network systems and improves system robustness, allowing it to readily adapt to harsh environments.

Redundant Power Supply
Redundant power supply ensures that the device is still powered when one power port malfunctions, vastly improving device reliability.

Fast Loop Convergence
Supports ERPS protocol to provide loop protection. Convergence time can be no more than 50 ms when a link disconnection occurs.

All logos & trade marks represent the registered users only. All rights reserved.
All product specifications on this brochure are subject to change without notice.

Hardware	
PoE	Yes
Ethernet Port	8
Optical Port	2
Ethernet Port Speed	10 Mbps/100 Mbps/1000 Mbps
Optical Port Speed	1000 Mbps
Console Port	1
Power Supply Mode	48 V–57 V DC
Operating Temperature	–40°C to +75°C (–40°F to +167°F)
Operating Humidity	10%–90% (RH)
Power Consumption	Idling: ≤ 6 W Full load: 120 W
Performance	
Layer	12
Managed	Yes
Switching Capacity	28 Gbps
Packet Forwarding Rate	14.88 Mpps
Packet Buffer Size	4 Mbits
Communication Standard	IEEE 802.3; IEEE 802.3u; IEEE 802.3x; IEEE 802.3ab; IEEE 802.3z; IEEE 802.3ad
MAC Table Size	8K
Function	
PoE Protocol	IEEE 802.3af (PoE); IEEE 802.3at (PoE+); Hi-PoE; IEEE 802.3bt
PoE Power	Port 1-2: ≤ 90 W Port 3-8: ≤ 30 W Total: ≤ 120 W
PoE Power Consumption Management	Power consumption management PoE power on and off Power off when PoE power is overloaded Green PoE
PoE Pin Assignment	1, 2, 4, 5 (V+), 3, 6, 7, 8 (V-)
Long Distance PoE Transmission	Yes
Jumbo Frame	9,000 bytes
Spanning Tree Protocol	ERPS
VLAN Function	802.1Q
Flow Control	Full-duplex flow control (back pressure) Full-duplex flow control (PAUSE)
Link Aggregation	Static link aggregation; LACP
Port Mirroring	Multiple-to-one port mirroring
Multicast	Yes
DHCP Function	DHCP client DHCP-Server DHCP-Snooping
Security	User management HTTPS SSH SNMP V1/V2C/V3 RMON ACL IP source guard Port/VLAN-based ARP check Static ARP check Dynamic ARP check 802.1x Loop protection
QoS	CoS/DPL/PCP/DEI-based QoS 8 output queue for each port Port shaping Port tag remarking DSCP-based QoS
Maintenance	Uploading/downloading configuration files Online upgrade System logs
Device Management	Web (HTTP and HTTPS protocol); Telnet; SNMP; CLI
General	
Statics Protection	Air discharge: 8 kV Contact discharge: 6 kV
Lighting Protection	Common mode: 6 kV Differential mode: 4 kV
Net Weight	1.25 kg (2.76 lb)
Gross Weight	1.52 kg (3.35 lb)
Product Dimensions	125.4 mm × 53.5mm ×175.0 mm (4.9” × 2.1”× 6.9")
Packing Dimensions	254 mm × 287 mm × 101 mm (10.00” × 11.3”× 3.97")

Transmission Performance

Switch power supply voltage 53V.
CAT5E/CAT6. Max. DC resistance < 10Ω/100m

Cable (m/ft)	Load Capacity(W)	Bandwidth(Mbps)
IEEE802.3bt 90W		
100m / 328ft	71.3	100
150m / 492ft	62	10
200m / 656ft	51	10
250m / 820ft	40	10
Hi-PoE 60W		
100m / 328ft	53	100
150m / 492ft	50	10
200m / 656ft	47	10
250m / 820ft	37	10
IEEE802.3at 30W		
100m / 328ft	25.5	100
150m / 492ft	25.5	10
200m / 656ft	25.5	10
250m / 820ft	25.5	10

Dimensions (mm[inch])

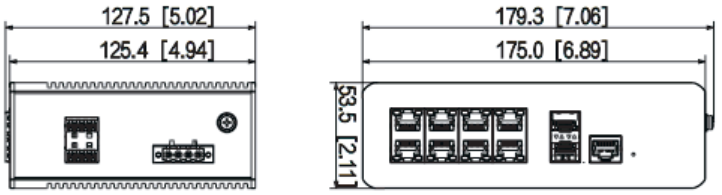

Installation



CANADA:
351 Ferrier Street, Unit 5
Markham, ON L3R 5Z2
Toll Free: 1-866-843-6865
Tel: 416-410-6865

USA:
171 Cooper Ave. Suite 110
Tonawanda, NY 14150 USA
Toll Free: 1-866-843-6865
Local: 1-716-877-7277

UAE:
P O Box 126312
No 703, Oxford Towers
Business Bay, Dubai, UAE
Tel: + 971 4 2767117

Jan. 03, 2022

info@watchnetinc.com
www.watchnetinc.com