




BLS-N64A18 64 Channel Network Video Recorder



Key Features

- Up to 64ch IP cameras inputs
- Up to 384 Mbps incoming bandwidth
- Up to 12MP resolution for preview and playback
- Supports face recognition and multi-object recognition from camera
- 2.5U, 8 SATA hard disk each up to 12TB
- Support RAID 5/6/10
- Support 2 HDMI and 1 VGA interface
- 2 RJ45 10M/100M/1000M network interface

Dimensions (mm)

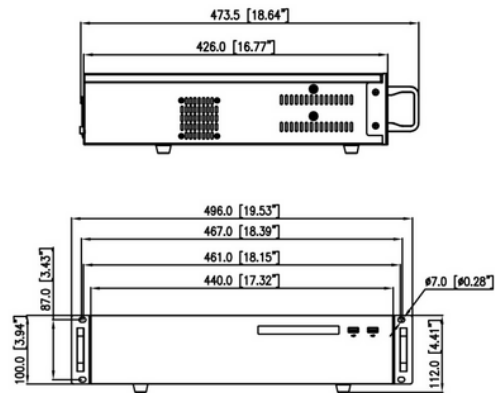

Rear Panel



Note:

WatchNET NDA Network Video Recorders work only with Blue Series Cameras



Specifications

Video Input	
IP Camera Input	64 Channel
Incoming Bandwidth	384Mbps
Outgoing Bandwidth	384Mbps

Video output	
HDMI 1 Output	3840×2160, 1920×1080, 1280×1024, 1024×768
HDMI 2 Output	1920×1080, 1280×1024, 1024×768
VGA Output	1920×1080, 1280×1024, 1024×768
Different Source Output	Support
Decoding Capacity	1ch 12MP, 4ch 8MP, 8ch 4MP, 16ch 1080P, 32ch D1
Dual Stream	Support
Multi-screen Display	1st Screen: 1/4/8/9/16/32 2nd Screen: 1/4/8/9/16

AI Recognition	
Face Comparison	Real-time captured and display faces comparison results (registrant (name and ID), stranger, channel, similarity)
Multi-object	Real-time captured and display vehicle, human body, non-motor vehicle, license plates image, and faces comparison results (registrant, stranger, channel, similarity)
Smart Search	Time, Properties, Pictures, Gender, Cycling style, Vehicle color, License plate
Trigger Events	Buzzer, Alarm push, Alarm prompt, Email, Alarm Out, Compare the result simultaneously, etc.

Recoding	
Resolution	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS

Playback and Backup	
Sync Playback	16/9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network, eSATA

Alarm	
General Alarm	Motion Detection, Video Loss, IVS, Alarm in, Alarm out
Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect
Intrusion Detection	Support the accurate detection of vehicle and human

Network	
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
Remote Users	16 users
P2P	Support
Interoperability	ONVIF, SDK
Network Interface	2 × RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port

Disk Array	
Array Type	RAID 5, RAID 6, RAID 10
HDD	8 SATA Ports, up to 12TB capacity for each disk
eSATA	1 eSATA Interface

Interface	
Audio In/Out	1/1
Alarm In/Out	16/6
USB Interface	4 ports (Front panel: 2 × USB 2.0, Rear panel: 2 × USB 3.0)
RS485 Interface	1 Port
RS232 Interface	1 Port
Reset Button	Built-in

General	
Power Supply	AC100 ~ 240V
Power Consumption	< 15 W (without HDD)
Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC
Dimensions	426 × 440 × 112 mm (16.77 × 17.32 × 4.41 inch)
Net Weight	7.3 kg (16.09 lb) without HDD

*All logos & trade marks represent the registered users only. All rights reserved.

*All product specifications on this brochure are subject to change without notice.



CANADA:
351 Ferrier Street, Unit 5
Markham, Ontario L3R 5Z2
Canada
Tel: 416-410-6865
Toll Free: 1-866-843-6865

USA:
171 Cooper Ave.
Suite 110, Tonawanda
New York 14150, USA
Tel: 1-716-877-7277
Toll Free: 1-866-843-6865

MIDDLE EAST:
PO Box No 126312
Office Suite 703, Oxford
Tower Business Bay, Dubai,
UAE
Tel: + 971 4 2767117

March 2024

www.watchnetinc.com
info@watchnetinc.com