




Power Supply

WAA-POW-04UL

Key Features:

- Operational Input Voltage 100V to 240V AC
- High Efficiency
- Built-in charger for batteries
- Zero voltage drop upon transfer to battery backup
- Short Circuit Protection (Output shuts down and restarts automatically)
- Automatic switch over to stand-by battery when AC fails
- Over-Discharge Protection

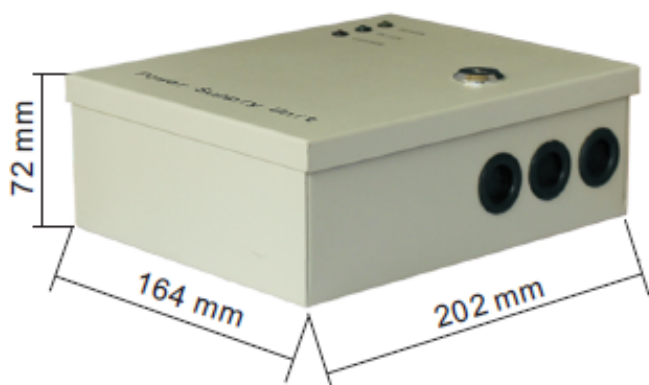

SUPPORT	
Input Voltage	100-240VAC
Output Voltage	13.8V DC
Total Output Current	5A 1.25A*4CH
Efficiency	>80%
Work Temperature	-0°C ~ 40°C
Storage Temperature	-25°C ~ 75°C
Humidity	95RH
Rated Input Voltage	220VAC
Input Voltage Range	100-240VAC
Input Current	1.8A
Input Freq Range	50/60Hz
Voltage Regulation	13.8V DC ±5%
Voltage with full load	13.8V DC ±5%
Products Size	202×164×72mm
Fuse Type	1.6A PTC FUSE

All logos & trade marks represent the registered users only. All rights reserved.
All product specifications on this brochure are subject to change without notice.

CANADA

351 Ferrier Street Unit 5,
Markham, Ontario L3R 5Z2
Tel. +1-416-410-6865
Toll Free: 1-866-843-6865

USA

417 Old Falls Blvd.
North Tonawanda,
New York 14120-3107
Toll Free: 1-866-843-6865
Tel. +1-716-877-7277

MIDDLE EAST

PO Box No 126312
Suite 703 Oxford Tower
Business Bay, Dubai, UAE
Tel. + 971-4-2767117

www.watchnetinc.com
info@watchnetinc.com

