

WatchNET BLZ

5MP NDAA Camera



CE FC



BLZ-50T3M

5 Megapixel Smart Dual Light Camera



KEY FEATURES:

- **5MP** 1/2.7" CMOS Sensor for high-definition imaging
- **H.264+ and H.265+ Compression** for efficient video encoding
- **Infrared Range:** Up to 40 meters for clear night vision
- **Warm Light Range:** Up to 40 meters, ensuring optimal visibility in low light
- **Perimeter Protection:** Advanced motion detection with SMD (Smart Motion Detection) support
- **Supports up to 256GB** Micro SD Card for ample storage
- **Lens:** 2.8mm fixed lens
- **Power Supply:** 12 VDC or Power over Ethernet (PoE) support
- **IP67 Rating:** Weatherproof and dustproof for reliable outdoor use

CAMERA	
Image Sensor	1/2.7" Progressive CMOS
Max. Resolution	5MP, 2880 (H) × 1620 (V)
Electronic Shutter	Auto/Manual 1/3 s–1/100,000 s
Min. illumination	0.006Lux(Illuminator off); 0Lux (Illuminator on)
S/N Ratio	> 56 dB
Illumination Distance	IR distance 40m, Warm light distance 40m
Illuminator Control	Auto; Manual

LENS	
Lens Type	Fixed-Focal
Focal Length	2.8mm
Max. Aperture	F1.6
Field of View	Horizontal: 111°, Vertical: 59°, Diagonal: 134°
Iris Type	Auto


VIDEO	
Compression	H.264H; H.264M; H.264B; H.265
Smart Compression	H.264H+; H.264M+; H.264B+; H.265+
Bit Rate Control	CBR/VBR
Bit Rate	H.264: 3 Kbps–20480 Kbps H.265: 3 Kbps–20480 Kbps
Stream Capability	3 Streams
Video Frame Rate	Main Stream: 5MP (1 fps–25/30 fps) Sub Stream: D1 (1 fps–25/30 fps) Third Stream: 720P (1 fps–25/30 fps)
Day/Night	Color/B/W
BLC, HLC	Yes
White Balance	Yes
Gain Control	Auto/Manual
WDR	DWDR
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 Areas, rectangular)
Image Rotation	180°
Mirror	Yes
Privacy Masking	4 Areas

ALARM	
Arming/Disarming	NA (Optional)
Sound Alarm	NA (Optional)
Light Alarm	Yes
Alarm Event	Disconnection; IP Conflict; No SD Card; Capacity Warning; SD Card Error

SMART FUNCTION	
Intelligent Analysis	Intrusion, Tripwire (Support the classification of Vehicle, Human and Non-Motor)
Motion Detection	Support
AI Search	Work together with NVR

NETWORK	
Network	RJ-45 (10/100 Base-T)
SDK and API	Yes
Network Protocol	TCP/IP; UDP; HTTP; IGMP; ICMP; DHCP; RTP/RTSP; DNS; DDNS; FTP; NTP; PPPOE; UPNP; SMTP
Interoperability	ONVIF; CGI; P2P (Optional)
User/Host	20 (Total bandwidth: 80 M)
Storage	FTP; Micro SD card (support max. 256 G/FAT32)
Browser	IE: IE8 and later; Chrome; Firefox
Mobile Client	IOS; Android
Management Software	eVMS-BLZ

ENVIRONMENT	
Power Supply	12V DC (±30%)/PoE (802.3af)
Power Consumption	Basic: 2.8 W; Max. 5.5W
Operating Conditions	–35°C to +60°C / <95% RH
Storage Conditions	–40°C to +60°C (–40°F to +140°F)
Protection Grade	IP67
Casing	Metal
Dimensions	110 mm × Φ122 mm
Net Weight	630g

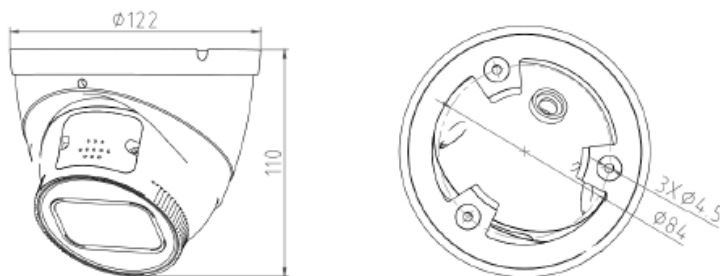

ACCESSORIES	
BLZ-BB-48	
BLZ-WM-48	



WatchNET



*All logos & trade marks represent the registered users only. All rights reserved.

*All product specifications on this brochure are subject to change without notice.

CANADA
351 Ferrier St. Unit 5
Markham, Ontario L3R 5Z2
Tel. +1-416-410-6865
Toll Free: 1-866-843-6865

USA
417 Old Falls Blvd.
N. Tonawanda, NY 14120
Tel. +1-716-877-7277
Toll Free: 1-866-843-6865

MIDDLE EAST
PO Box No 126312
Suite 703 Oxford Tower
Business Bay, Dubai, UAE
Tel. + 971-4-2767117

www.watchnetinc.com
info@watchnetinc.com

May 2025