

**16CH 1U 16PoE**  
2HDDs Lite Network Video Recorder




ENI-16POE






## Features:



- Supports Smart H.265+, H.265, Smart H.264+, H.264 and MJPEG decoding formats.
- Max. decoding capability: 8 × 1080p@30 fps or 2 × 8 MP@30 fps.
- Max. 160/160/80 Mbps incoming/recording/outgoing bandwidth.
- Supports IP cameras with a resolution up to 12 MP.
- AI by Recorder supports 4-channel SMD Plus.
- AI by Camera supports face detection and recognition, perimeter protection, SMD Plus, people counting, stereo analysis and heatmap.
- Supports EPTZ, and one-click arming and disarming.

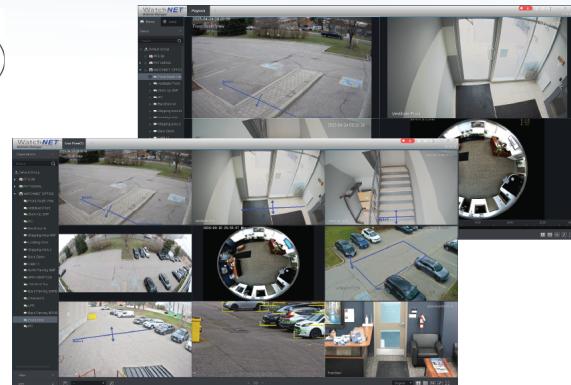

FREE Multisite VMS software  
Download from [www.watchnetinc.com](http://www.watchnetinc.com)

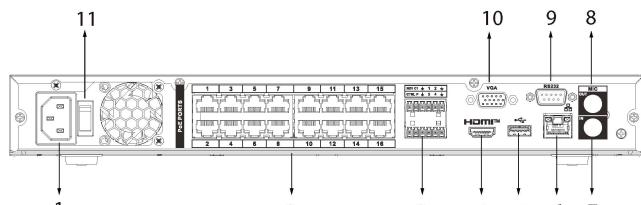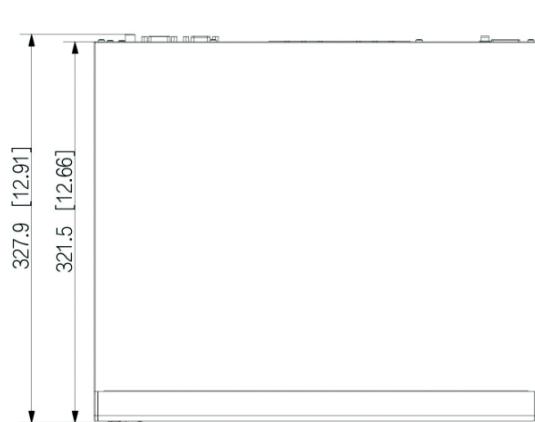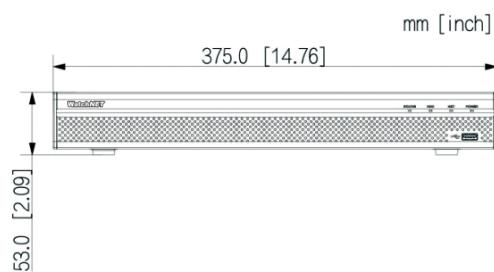

1 Power Input	2 PoE Ports
3 Alarm In/Out	4 HDMI Port
5 USB Port	6 Network Port
7 AUDIO IN, RCA Connector	8 AUDIO OUT, RCA Connector
9 RS-232 Port	10 VGA Port
11 Power Switch	

Onvif



Technical Specifications	
System	
Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operation Interface	Web, Local GUI
AI	
AI by Recorder	SMD
AI by Camera	Face detection; face recognition; perimeter protection; SMD Plus; people counting; stereo analysis; heat map
Perimeter Protection	
Perimeter Performance of AI by Camera (Number of Channels)	6 channels
Face Detection	
Face Attributes	Gender; age group; glasses; expressions; face mask; beard
Face Detection Performance of AI by Camera (Number of Channels)	6 channels
Face Recognition	
Face Recognition Performance of AI by Camera (Number of Channels)	6 channels
SMD Plus	
SMD Plus by Recorder	4 channels: Secondary filtering for human and motor vehicle, reducing false alarms caused by leaves, rain and lighting condition change
SMD Plus by Camera	6 channels
Audio and Video	
Access Channel	16 channels
Network Bandwidth	AI disabled: 160 Mbps incoming, 160 Mbps recording and 80 Mbps outgoing AI enabled: 80 Mbps incoming, 80 Mbps recording and 60 Mbps outgoing
Resolution	12 MP; 8 MP; 6 MP; 5 MP; 4 MP; 3 MP; 1080p; 720p; 960p; D1; CIF; QCIF
Decoding Capability	AI disabled: 1-channel 12 MP@30 fps; 2-channel 8 MP@30 fps; 3-channel 5 MP@30 fps; 4-channel 4 MP@30 fps; 8-channel 1080p@30 fps AI enabled: 1-channel 12 MP@30 fps; 1-channel 8 MP@30 fps; 2-channel 5 MP@30 fps; 3-channel 4 MP@30 fps; 7-channel 1080p@30 fps
Multi-screen Display	Main Screen: 1/4/8/9/16 Sub Screen: 1/4/8/9/16

Video Output	1 HDMI, 1 VGA Simultaneous : HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 Heterogeneous : HDMI: 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720
Third-party Camera Access	ONVIF; Panasonic; Sony; Axis; Arecont; Pelco; Canon; Hanwha
Compression Standard	
Video Compression	Smart H.265+; H.265; Smart H.264+; H.264
Audio Compression	G.711a; G.711u; PCM; G726
Network	
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; IPv6; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; SNMP; Alarm Server; P2P; Auto Registration; IP Search (Supports IP camera, DVR, NVS, etc.)
Mobile Phone Access	iOS; Android
Interoperability	ONVIF 23.12 (Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome; IE; Safari; Edge; Firefox
Recording Playback	
Multi-channel Playback	Up to 16 channels
Record Mode	General, motion detection; intelligent; alarm
Backup Method	USB device and network
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback
Storage	
Disk Group	Yes
Alarm	
General Alarm	Motion detection; privacy masking; video loss; scene changing; PIR alarm; IPC external alarm
Anomaly Alarm	Camera disconnection; storage error; disk full; IP conflict; MAC conflict; login locked; and cybersecurity exception
Intelligent Alarm	Face detection; face recognition; perimeter protection; SMD Plus; people counting; stereo analysis; heat map
Alarm Linkage	Record; snapshot; IPC external alarm output; audio; buzzer; log; preset; email
Port	
Audio Input	1-channel RCA
Audio Output	1-channel RCA
Alarm Input	4 channels
Alarm Output	2 channels (1-channel 12 V 1 A output)

**CANADA:**  
351 Ferrier Street, Unit 5  
Markham, ON L3R 5Z2  
Toll Free: 1-866-843-6865  
Tel: 416-410-6865

**USA:**  
417 Old Falls Blvd. STE A  
Tonawanda, NY 14120-3107  
Toll Free: 1-866-843-6865  
Local: 1-716-877-7277

**UAE:**  
PO Box 126312  
No 703, Oxford Towers  
Business Bay, Dubai, UAE  
Tel: +971 4 2767117

Nov. 2025

[info@watchnetinc.com](mailto:info@watchnetinc.com)  
[www.watchnetinc.com](http://www.watchnetinc.com)

Disk Interface	2 SATA port. Each disk can contain up to 20 TB. This limit varies depending on the environment temperature.	
RS-232	1	
USB	2 (1 front USB 2.0 port, 1 rear USB 2.0 port)	
HDMI	1	
VGA	1	
Network Port	1 (10/100/1000 Mbps Ethernet port, RJ-45)	
PoE Port	16 ports, 10/100 Mbps, IEEE 802.3 af/at	
<b>General</b>		
Power Supply	100–240 VAC, 50/60 Hz	
Power Consumption	Total output of NVR is <10 W(without HDD) Total output power of PoE is 130W, the maximum output power of a single port is 25.5W	
Net Weight	2.60 kg (5.73 lb)	
Gross Weight	3.80 kg (8.38 lb)	
Product Dimensions	375.0 mm × 327.9 mm × 53.0 mm (14.76" × 12.91" × 2.09") (W × D × H)	
Packaging Dimensions	451.0 mm × 147.0 mm × 425.0 mm (17.76" × 5.79" × 16.73") (W × D × H)	
Operating Temperature	–10 °C to +55 °C (14 °F to +131 °F)	
Storage Temperature	–20 °C to +60 °C (–4 °F to +140 °F)	
Operating Humidity	10%–93% (RH), non-condensing	
Installation	Rack or desktop	
Certifications	CE-EMC: EN 55032:2015+A1:2020; EN IEC 61000-3-2:2019+A1:2021; EN 61000-3-3:2013+A1:2019+A2:2021; EN 55035:2017+A11:2020; EN 50130-4:2011+A1:2014 CE-LVD: EN 62368-1:2014	
<b>Ordering Information</b>		
Type	Model	Description
NETWORK VIDEO RECORDER	ENI-16POE	16CH 1U 16PoE 2HDDs Lite Network Video Recorder

\* All product names, logos and brands are property of their respective owners. All company products and service names used on this box/website/brochure are for identification purposes only. Use of these names, logos and brands does not imply endorsement. 2025 WatchNET Inc. © All Rights Reserved. All product specifications are subject to change without notice.

**CANADA:**  
351 Ferrier Street, Unit 5  
Markham, ON L3R 5Z2  
Toll Free: 1-866-843-6865  
Tel: 416-410-6865

**USA:**  
417 Old Falls Blvd. STE A  
Tonawanda, NY 14120-3107  
Toll Free: 1-866-843-6865  
Local: 1-716-877-7277

**UAE:**  
PO Box 126312  
No 703, Oxford Towers  
Business Bay, Dubai, UAE  
Tel: + 971 4 2767117

Nov. 2025

[info@watchnetinc.com](mailto:info@watchnetinc.com)  
[www.watchnetinc.com](http://www.watchnetinc.com)