

5 Megapixel Pro AI Vari-Focal Bullet Network Camera



BLZ-5BVM50

KEY FEATURES:

- **5MP** 1/2.7" CMOS Sensor
- Support H.264+, H.265+
- IR distance **50m**, Warm light distance **50m**
- Perimeter Protection, Face Detection, SMD, Smart Object Detection, People Counting
- Support **Built-in Mic (optional) & Speaker**
- Support White Light Alarm, Sound Alarm, Arm and Disarm
- Supports max. 256 G Micro SD card
- 2.7 mm–13.5 mm **5x zoom** lens
- 12 VDC/PoE power supply
- **IP67, IK10** protection

Camera	
Image Sensor	1/2.7" CMOS
Max. Resolution	5MP, 2880 (H) × 1620 (V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
Min. illumination	0.001Lux(Illuminator off); 0Lux (Illuminator on)
S/N Ratio	> 56 dB
Illumination Distance	IR distance 50m, Warm light distance 50m
Illuminator Control	Auto; Manual

Lens	
Lens Type	Motorized Vari-Focal
Focal Length	2.7 mm–13.5 mm
Max. Aperture	F1.6
Field of View	Horizontal: 99°–28°, Vertical: 71°–21°, Diagonal: 134°–35°

Audio	
Built-in Mic	Yes
Built-in Speaker	Yes
Two-way talk	Yes
Audio Compression	G.711a; G.711Mu; G.726; G.726ASF

Intelligence	
Smart Motion Detection	Yes
Perimeter Protection	Intrusion, Tripwire (Support the classification of Vehicle, Human and Non-Motor)
Face Detection	Yes
People Counting	Yes
Heat Map	Yes
Video Metadata	NA
AI Search	Work together with NVR

Alarm	
Arming/Disarming	Yes
Sound Alarm	Yes
Light Alarm	Yes
Alarm Event	Disconnection; IP Conflict; No SD Card; Capacity Warning; SD Card Error

Port	
Audio Input	NA(1 channel optional)
Audio Output	NA(1 channel optional)
Alarm Input	NA(1 channel optional)
Alarm Output	NA(1 channel optional)

Video	
Compression	H.264H; H.264M; H.264B; H.265
Smart Compression	H.264H+; H.264M+; H.264B+; H.265+
Video Frame Rate	Main Stream: 5MP (1 fps–25/30 fps) Sub Stream: D1 (1 fps–25/30 fps) Third Stream: 720P (1 fps–25/30 fps)
Stream Capability	3 Streams
Bit Rate Control	CBR/VBR
Video Bit Rate	H.264: 3 Kbps–20480 Kbps, H.265: 3 Kbps–20480 Kbps
Day/Night	Color/B/W
BLC	Yes
HLC	Yes
WDR	120 dB
White Balance	Yes
Gain Control	Auto/Manual
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 Areas, rectangular)
Image Rotation	180°
Mirror	Yes
Privacy Masking	4 Areas
Power	
Power Supply	12V DC (±30%)/PoE (802.3af)
Power Consumption	Basic: 2.8 W; Max. 6.5W

Network	
Network	RJ-45 (10/100 Base-T)
SDK and API	Yes
Network Protocol	TCP/IP;UDP;HTTP;IGMP;ICMP;DHCP;RTP/RTSP;DNS;DDNS;FTP;NTP;PPPOE;UPNP;SMTP
Interoperability	ONVIF; CGI; P2P
User/Host	20 (Total bandwidth: 80 M)
Storage	FTP; Micro SD card (support max. 256 G/FAT32)
Browser	IE: IE8 and later; Chrome; Firefox
Management Software	PC Software (eVMS-BLZ)
Mobile Client	IOS; Android (WatchNET BLZ)

Environment	
Operating Conditions	–30°C to +60°C (–22°F to +140°F)/Less than 95% RH
Storage Conditions	–40°C to +60°C (–40°F to +140°F)
Protection Grade	IP67,IK10


Structure	
Casing	Metal
Dimensions	244 mm × 77mm × 76mm
Net Weight	830g

ACCESSORIES

Optional



BLZ-BB-BUL
Junction Box (Metal)

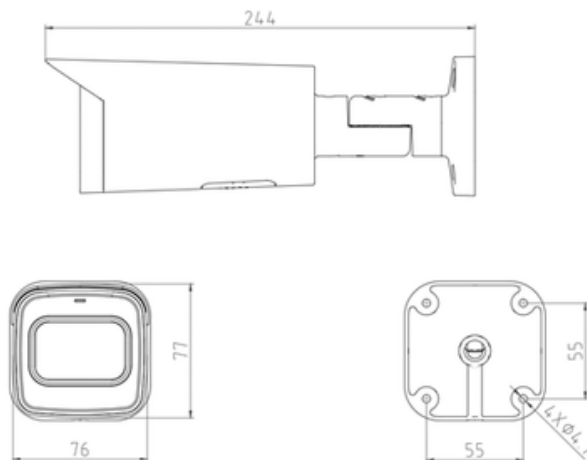

*All logos & trade marks represent the registered users only. All rights reserved.
*All product specifications on this brochure are subject to change without notice.

CANADA
351 Ferrier St. Unit 5
Markham, Ontario L3R 5Z2
Tel. +1-416-410-6865
Toll Free: 1-866-843-6865

USA
417 Old Falls Blvd.
N. Tonawanda, NY 14120
Tel. +1-716-877-7277
Toll Free: 1-866-843-6865

MIDDLE EAST
PO Box No 126312
Suite 703 Oxford Tower
Business Bay, Dubai, UAE
Tel. + 971-4-2767117

WatchNET
BLZ

www.watchnetinc.com
info@watchnetinc.com



March 2026