


SIP Indoor Monitor

AMCSM7 Quick Guide

(1) Introduction

AMCSM7 is a multifunctional communicator, with an Android operating system, provides audio and video communication with Door phones via SIP 2.0 protocol. It delivers the ultimate touch screen experience in an unobtrusive, space-saving design featuring a brilliant 7-inch capacitive touch screen display and 5 soft-touch buttons.

(2) Wiring

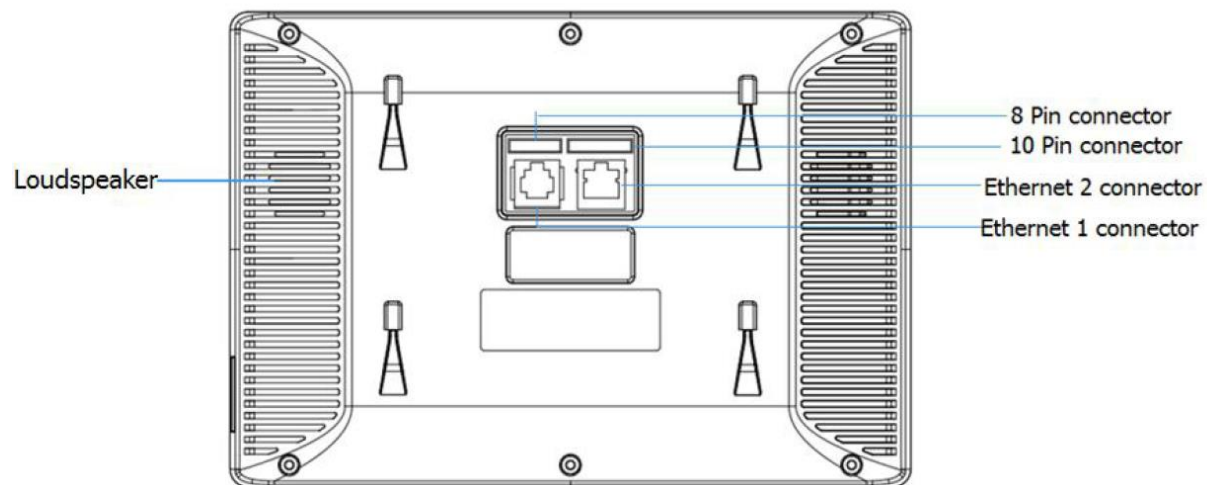

8 PIN Connector									
+12V	GND	X	X	485+	485-	NO	COM		
Power Supply		Reserved		RS485 Connection		Relay Output			
10 PIN Connector									
IO1	IO2	IO3	IO4	IO5	IO6	IO7	IO8	X	GND
Alarm Input							Reserved	Alarm	
Ethernet Connector									
Ethernet 1					POE Input				
Ethernet 2					Network Input				

(3) Power

SIP Desk Phone Supports 12V DC power supply

(4) Powering up SIP Desk Phone

- a) First setting to configure is the network of the Desk phone, connect to the internet or via Wi-Fi
- b) Second is the SIP account to be able to call outgoing
- c) Please refer to the manual for full configuration


(5) Troubleshooting

If the SIP Desk Phone does not turn on or does not work properly please refer on below solutions

Possible causes	Solutions
Indoor monitor does not turn on	Make sure to connect POE or 12VDC
Indoor monitor no network connection	Please make sure that indoor monitor is set to DHCP to get IP from the network
Indoor monitor not receiving calls	Make sure to setup the SIP account or a proper IP address to dial

Note: if any solutions above did not work please contact WatchNET Technical Support phone number +1-866-843-6865 or visit our website @ www.watchnetinc.com

Scan QR Code to Download the Application

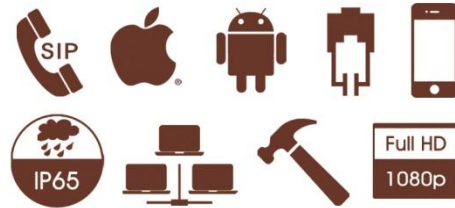

Note: Any 3rd party VOIP phone app can also be use by the user

CANADA: (Corporate Office)

351 Ferrier Street Unit 5
 Markham, Ontario L3R 5Z2
 Toll Free: 1-866-843-6865
 Tel: 1-416-410-6865
 Fax: 1-866-331-3341

USA:

171 Cooper Ave. Suite 110
 Tonawanda, NY 14150 USA
 Toll free: 1-855-404-3193
 Fax: 1-866-331-3341

INDIA:

RZ-2, Ground Floor
 Kpashera,
 Opp Kapashera Police station
 New Delhi-110037
 Tell: +91 11 26816005
 Fax: +91 9654297002

UAE:

P O Box No. 126312
 Dubai, UAE
 Tel: +971 43584458
 Fax: +971 43584458
 Mobile: +971 505869290

Info@watchnetinc.com
www.watchnetinc.com

Hong Kong

Unit 04, 7/F
 Bright Way Tower
 #33 Mong Kok Road
 Kowlon, HK
 Tel: 00852-27935511
 Fax: 00852-35902333
 hk@watchnetinc.com